


MT-36 3.5" TFT LCD Monitor User Manual

Thank you very much for purchasing this product. To be sure the system works properly, please connect the power correctly as described below. To extend the work life of this product, please do not drop or shake heavily. If you have any problems, please contact your supplier for additional assistance.

SPECIFICATIONS:

Screen Size	3.5 inch TFT LCD
Resolution	960 (W) X 234 (H) mm dots
Contrast Ratio	350:1
View Angle	Horizontal 60 degrees (Typ.) / Vertical 55 degrees (Typ.)
Color Structure	R.G.B. STRIPE
Backlight	LED 6 type
Video Signal	NTSC/PAL auto-switch
Input Signal	1.0Vp-p 75Ohm
Power	AA Alkaline Battery X 8pcs or DC12V Adaptor
Power Consumption	2W max.
Brightness	270cd/m2 Typ.
Response Time	Typ. 10ms; Max. 15 ms
Operation temperature	-10°C - 60 °C
Case Material	ABS HB
Storage temperature	-20°C - 70°C
Outlook Size & Weight	96(L) X 98 (W) X 25(D)mm / 620g with accessories and package
OSD Function	Brightness / Contrast / Audio / Rest
Standard Accessories	Armful Bag / BNC with Cable / Power Cable / Battery Case
Optional Accessories	2600mA NI-MH AA Battery X 8PCS + Battery Charger

SYSTEM CONNECTION:

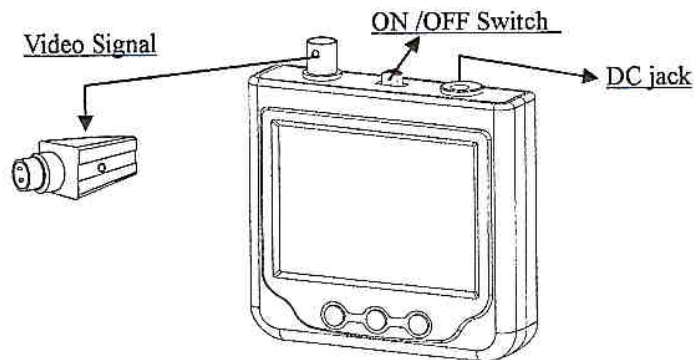

POWER CABLE CONNECTION:

Plug to Power socket of monitor

