



YOKO 1/3" B/W CCD BULLET CAMERA

MODEL: YK3759(A)




Front View

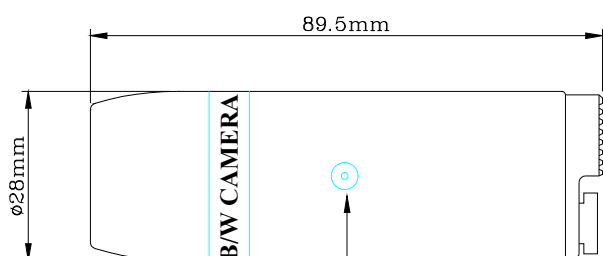


Microphone

Side View

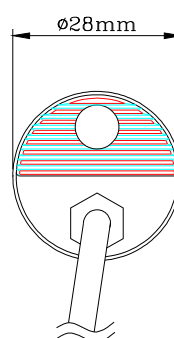

Rear View

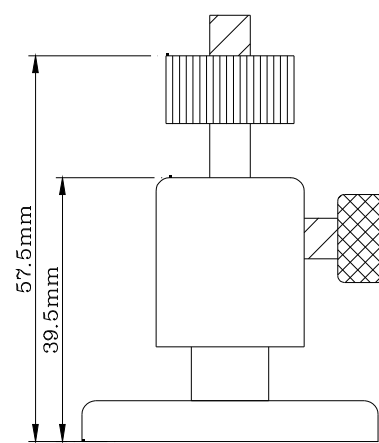

Mounting Bracket

FEATURES

- ❑ B/W camera with 1/3" CCD sensor in bullet type case.
- ❑ Pixel number: EIA=270K / CCIR=320K.
- ❑ High sensitivity, low smear, high anti-blooming.
- ❑ Auto Electronic Shutter (AES), Auto Gain Control (AGC), optional audio function.
- ❑ Economical, furnished mounting bracket, built-in with board lens.
- ❑ Furnished with DC power & signal cable.
- ❑ DC type, low power consumption.
- ❑ Easy to install, easy to use. Aesthetic.
- ❑ YK3759: With weatherproof. Without audio function.
- ❑ YK3759A: With audio function. Without weatherproof.

SPECIFICATIONS (Note: Design and specifications are subject to change without prior notice.)

Model No.	YK3759	YK3759A
Image Pick-up Device	1/3" interline transfer CCD Sensor.	
Effective Picture Elements	EIA:510×492, CCIR: 500×582 (H×V)	
Horizontal Resolution	400 horizontal TV lines	
Minimum Illumination	0.3 LUX @ F2.0	
S/N Ratio	More than 48 dB	
Auto Electronic Shutter	EIA: 1/60s ~ 1/100,000s , CCIR: 1/50s ~ 1/110,000s.	
Auto Gain Control	Yes.	
Gamma Characteristic	0.45	
Lens Furnished	Board Lens f=3.6 mm / F2.0 (optional: f = 6.0 / 8.0 / 12 mm)	
Synchronous System	Internal, Negative sync.	
Video Output	1 Vp-p / 75 Ohms. BNCconnector.	
Audio Output	---	2 Vp-p / 50 Ohms, RCA connector.
Weatherproof	Yes.	No.
Power Supply	12V DC ±10	
Power Consumption	110mA. (1.32W)	120mA. (1.44W)
Operating Temp.	-10 to 50 (14 to 122)	