

## DS-D5022QE-B 21.5" Monitor

### key Features


- LED backlit technology with full HD 1920 x 1080
- Wide view angle: 170°(H)/160°(V)
- Multiply inputs: HDMI, VGA
- 3D comb filter, 3D De-interlace
- 3D noise reduction
- VESA stand bracket
- High reliable components for 7 x 24 working
- Green energy: Enter standby mode while no signal input

### Model

DS-D5022QE-B



### Interfaces

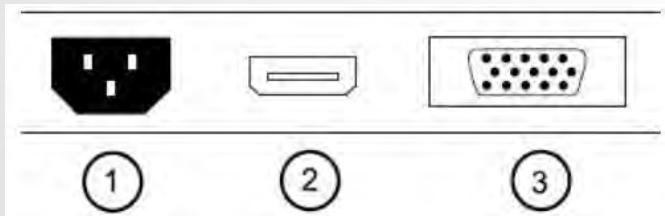

NO.	Description
1	Power Input
2	HDMI Digital Signal Input
3	VGA Analog Signal Input



## DS-D5022QE-B 21.5" Monitor



### Specification

Model	DS-D5022QE-B
Display	
Display Type	LED-Backlit
Screen Size	21.5"
Pixel Pitch(H×V)	0.248 mm x 0.248 mm
Max Resolution	1920 x 1080
Brightness	250 cd/m <sup>2</sup> (Typical)
Contrast	1000 : 1
Response Time	5 ms
Color	16.7 M
Viewing Angle	Horizontal 170°, Vertical 160°
Interface	
HDMI	1
VGA	1
Mounting	
VESA	100 mm x 100 mm
General	
Power Supply	100 ~ 240 V AC
Consumption	< 30 W(on) < 0.4 W(Standby)
Operation Temperature	0°C ~ 40 °C
Operation Humidity	10%~85% (No Condensation)
Storage Temperature	-20°C ~ 55°C
Storage Humidity	5%~95% (No Condensation)
Dimension (W×H×D)	511 mm × 313 mm × 170 mm
Weight	4.5 Kg(Gross weight) , 3.3 Kg(Net weight)
Included Accessories	VGA cord x 1, power cord x 1, user manual x 1, base bracket x 1,

**DS-D5022QE-B**  
**21.5" Monitor**



**Dimension (mm)**

