


DS-2CE56F7T-(A)ITZ 3MP Motorized VF EXIR Dome Camera



Key Features

- 3 Megapixel high-performance CMOS
- Analog HD output, up to 3MP resolution
- 2.8-12mm motorized vari-focal lens
- True Day/Night
- OSD menu, DNR, Smart IR
- True WDR, up to 120dB
- EXIR technology, up to 30m IR distance
- IP65 weatherproof
- Up the Coax(HIKVISION-C)

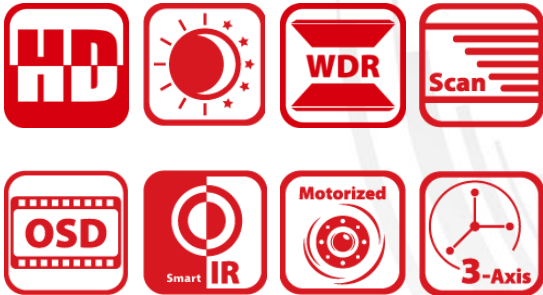


Specifications

| Camera | |
|----------------------|---|
| Image Sensor | 3MP CMOS Image Sensor |
| Effective Pixels | 2052(H)*1536(V) |
| Min. illumination | 0.01 Lux @ (F1.2,AGC ON),0 Lux with IR |
| Shutter Time | 1/25s to 1/50,000s |
| Lens | Motorized VF lens; 2.8 - 12 mm @ F1.2 |
| Lens Mount | φ14 |
| Day & Night | ICR |
| Angle Adjustment | Pan: 0° - 355°; Tilt:0° - 75°; Rotate: 0° - 355° |
| Synchronization | Internal Synchronization |
| WDR | 120dB |
| Video Frame Rate | 1920×1536@18fps |
| HD Video Output | 1 Analog HD output |
| S/N Ratio | > 62dB |
| Menu | |
| AGC | Support |
| D/N Mode | Color/BW/SMART |
| White Balance | ATW/ MWB |
| BLC | Support |
| Functions | Wide Dynamic Range, Digital noise reduction, Mirror, SMART IR |
| General | |
| Operating Conditions | -40 °C – 60 °C (-40 °F – 140 °F), Humidity 90% or less (non-condensing) |
| Power Supply | 12 VDC ± 15%; -A: 12 VDC ± 15% 24 VAC ± 15% |
| Power Consumption | Max. 4.5W; -A: Max. 6.5W |
| Protection Level | IP65 |
| IR Range | Up to 30m |
| Communication | Up the coax, Protocol: HIKVISION-C (TVI output) |
| Dimensions | Φ136mm×102mm (Φ5.35"×4.02") |
| Weight | Approx. 600g (1.32lb) |

Order Models

DS-2CE56F7T-ITZ, DS-2CE56F7T-AITZ

Dimensions

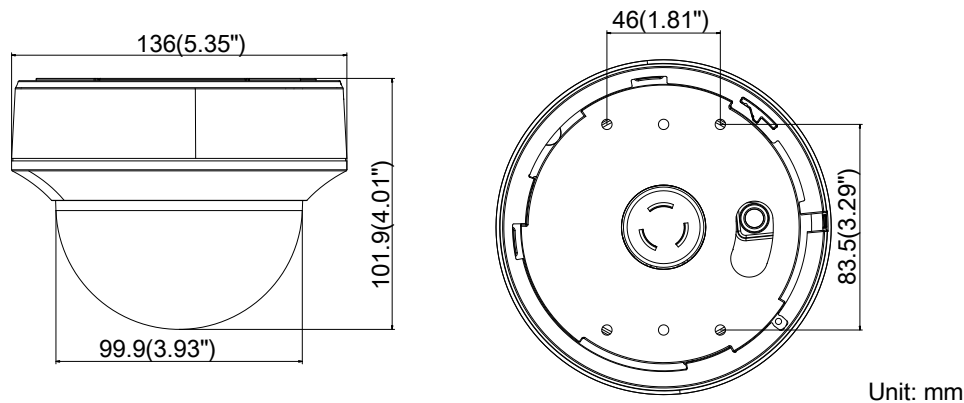

Accessories



DS-1275ZJ

Vertical Pole Mount



DS-1273ZJ-130

Wall Mounting



DS-1H18

Video Balun



X41T

Camera Tester



DS-1276ZJ

Horizontal Pole Mount



DS-1271ZJ-130

Pendant Mounting



DS-1273ZJ-130B

Wall Mounting



DS-1249ZJ

In-ceiling Mounting

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +44-1628-9021-4
support.uk@hikvision.com

Hikvision Europe
T +31-23-5542770
saleseuro@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision France
T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Hong Kong
T +852-2151-1761